

FIX Session Messages Specification

Please contact Currenex sales representatives and help desk personnel for more information on this documentation.

Contents

1 INTRODUCTION.....	2
2 PERSISTENCE AND SEQUENCE NUMBER RESETS	3
2.1 Non Persisted FIX Services.....	3
2.2 Persisted FIX Services.....	3
2.2.1 Persisted FIX Services Sequence Number Resets.....	3
2.2.2 Mismatched Sequence Number Counts.....	4
2.2.3 Cancel on Disconnect and Persistence.....	5
3 FIX MESSAGE LIMITS	6
4 SESSION MESSAGES	7
4.1 Session Message Details.....	7
4.1.1 Standard Header.....	7
4.1.2 Standard Trailer.....	8
4.1.3 Heartbeat.....	8
4.1.4 Logon.....	8
4.1.5 Logout.....	8
4.1.6 Resend Request.....	9
4.1.7 Sequence Reset.....	9
4.1.8 Test Request.....	9
5 APPENDICES	10
5.1 Revision History.....	10

Currenex Client Support

US Toll Free:	+ 1 877 939 8723
London:	+ 0 800 358 5331
Singapore:	+ 65 6826 7476
Tokyo:	+ 813 4530 7555

All Other Countries:

Primary:	+ 1 212-340-1790
Secondary:	+ 1 212-685-5950
support@currenex.com	

Currenex Sales

New York:	+ 212 340 5220
London:	+ 44 203 395 7930
Tokyo:	+ 81 3 4530 7555
Hong Kong:	+852 2230 1566
Singapore:	+ 65 6826 7476
Australia:	+ 612 8429 1204
sales@currenex.com	

Disclaimer

The products and services outlined herein are only offered to professional clients or eligible counterparties through State Street Bank and Trust Company (a wholly-owned subsidiary of State Street Corporation), or, within certain jurisdictions throughout Europe, through State Street Global Exchange Trading and Clearing International Limited which is authorized and regulated by the Financial Services Authority. Please note, certain foreign exchange business (spot and certain forward transactions) are not regulated by the Financial Services Authority. Clients should be aware of the risks of participating in trading foreign exchange, equities, fixed income or derivative instruments or in investments in non-liquid or emerging markets. Clients should be aware that products and services outlined herein may put their capital at risk. This communication is not intended for retail clients, nor for distribution to, and may not be relied upon by, any person or entity in any jurisdiction or country where such distribution or use would be contrary to applicable law or regulation. This publication or any portion hereof may not be reprinted, sold or redistributed without the prior written consent of State Street Global Exchange Trading and Clearing. This communication is being distributed in Australia by State Street Bank and Trust Company ABN 70 062 819 630, AFSL 239679 and is intended only for wholesale clients, as defined in the Corporations Act 2001.

1 Introduction

The Currenex FIX offering supports automated FX rate price streams, order entry, order execution on the Currenex platform.

The purpose of this document is to provide a detailed description of the supported FIX Session information and message set required to connect to Currenex for the following:

- FIX Taker Order Placement
- FIX Taker Market Data
- FIX Taker RFQ
- FIX Real Time STP Service
- FIX Maker RFQ
- FIX Maker ESP

Disclaimer

The products and services outlined herein are only offered to professional clients or eligible counterparties through State Street Bank and Trust Company (a wholly-owned subsidiary of State Street Corporation), or, within certain jurisdictions throughout Europe, through State Street Global Exchange Trading and Clearing International Limited which is authorized and regulated by the Financial Services Authority. Please note, certain foreign exchange business (spot and certain forward transactions) are not regulated by the Financial Services Authority. Clients should be aware of the risks of participating in trading foreign exchange, equities, fixed income or derivative instruments or in investments in non-liquid or emerging markets. Clients should be aware that products and services outlined herein may put their capital at risk. This communication is not intended for retail clients, nor for distribution to, and may not be relied upon by, any person or entity in any jurisdiction or country where such distribution or use would be contrary to applicable law or regulation. This publication or any portion hereof may not be reprinted, sold or redistributed without the prior written consent of State Street Global Exchange Trading and Clearing. This communication is being distributed in Australia by State Street Bank and Trust Company ABN 70 062 819 630, AFSL 239679 and is intended only for wholesale clients, as defined in the Corporations Act 2001.

2 Persistence and Sequence Number Resets

2.1 Non Persisted FIX Services

FIX message persistence is NOT supported on the following Currenex FIX services:

- FIX Taker Market Data
- FIX Taker RFQ
- FIX Real Time STP Service
- FIX Maker RFQ
- FIX Maker ESP

The inbound and outbound sequence number counts will be reset to one (1) with each new Logon. The client Logon message should always have either an initial sequence number of one (1) and or include tag 141=Y. The Currenex Logon reply message will always have an initial sequence number equal to one (1).

User can remain logged on to Currenex non-persisted services from 05:00 pm EST/EDT Sunday until approximately 05:00 on Fridays.

2.2 Persisted FIX Services

FIX persistence provides a means to receive missed order events if the connection to Currenex is lost or disconnects. A FIX session, once created at the beginning of the trading week, will exist across multiple sequential physical connections. The outbound (from Currenex to client) sequence numbers of a new physical connection will continue from the current position of the persistent session. On reconnect the client can use the sequence number in the logon confirmation message to detect a gap since the last received message and send a ResendRequest(35=2) to obtain missed messages. The Currenex system then will retransmit persisted messages based on the request. The amount of messages retained is configurable.

All available requested messages will be resent with updated SendingTime(52), OrigSendTime(122) included, PossDupFlag(43) field set to 'Y' and recalculated CheckSum value. A SequenceReset(35=4) message will be sent in lieu of the administrative messages, such as Logon, Logout and Heartbeat or when messages are no longer available because they either fell outside of the configured retention window or were lost due to some serious system failure. Client should avoid submitting subsequent ResendRequest messages. This will simply replace the prior ResendRequest resulting in a delay of normal processing. Currenex will never send ResendRequest to a client.

Users enabled for persistence can stay continuously connected on the Currenex FIX Taker Order service from 5 pm ET Sunday until 5 pm ET Friday.

2.2.1 Persisted FIX Services Sequence Number Resets

Prior to the Friday 17:00:00 ET FIX service shutdown, Currenex will send all connected FIX Taker Order service sessions a TradingSessionStatus message containing TradesStatus (340) = 5, to indicate the sequence number reset process is about to occur. Once received, users will be unable to send new orders or replace outstanding orders. However, outstanding orders can be canceled. Status changes to outstanding orders; e.g., fills, cancels, etc., if any occur, will continue to be sent while the service shuts down.

Note: TradingSessionStatus messages will only be sent on FIX Trade services prior to a weekly logout. It will not be sent on the FIX Market data or FIX STP sessions.

Currenex will then send a Logout message to disconnect all active client sessions. Upon receiving the Logout message, a client should disconnect. At this time, Currenex resets the outbound (CNX to Client) sequence number to one (1). Clients that use persistence can optionally reset their sequence number at this time – but aren't required. Upon logging in again with the Sunday exchange 5 pm ET start up, user with a persisted FIX session can send Logon with:

1. Continue with the next sequence number from the previous session.
2. Set 34=1 indicating a sequence number reset on their end

At any given time, if the client wants to reset the sequence number on Currenex upon Logon, it will have to send 34=1 with 141=Y

2.2.2 Mismatched Sequence Number Counts


If Currenex responds to a client initiated Logon message with a Logout message containing Text (58) = "MsgSeqNum too low, expecting <##> but received <#> Logon," the client should either

- Reset its sequence number to the stated expected value or
- Reset both the inbound and outbound sequence number counts to one (1); e.g., by sending the Logon message with ResetSeqNumFlag (141)=Y.

Clients unable to reset their sequence numbers should contact Currenex Customer support.

2.2.3 Cancel on Disconnect and Persistence

The Cancel on Disconnect or COD functionality allows user to have their working orders automatically canceled upon a loss of session connectivity. Upon a session disconnect the COD functionality checks for resting orders and marks them as canceled. For the users that are also enabled for persistence, Currenex will persist the cancel events that will be available for resend upon reconnect as ExecutionReport messages with 150=4(Cancel) confirming the canceled orders. On reconnect the client can use the sequence number in the logon confirmation message to detect a gap since the last received message and send a ResendRequest(35=2) to obtain these missed messages.

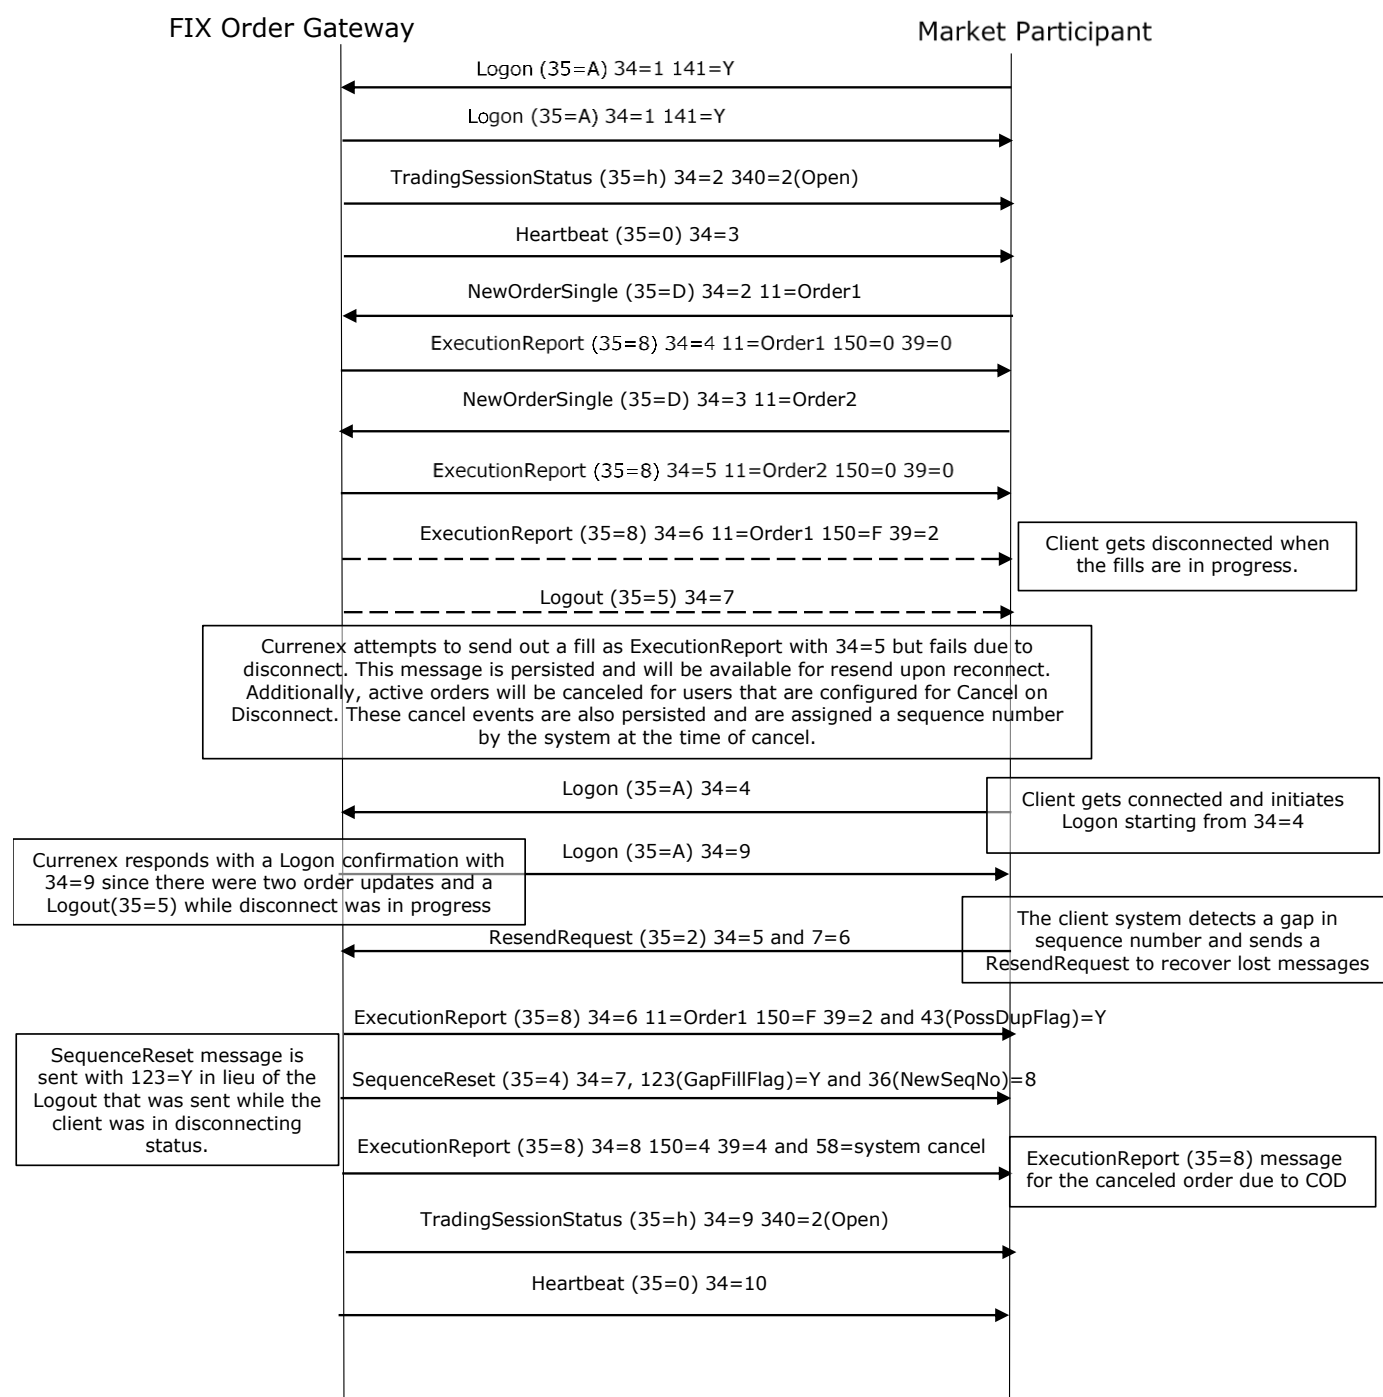

3 FIX Message Limits

Currenex maintains a FIX message limit a rolling time period. If a session breeches this limit, Currenex will send a TradingSessionStatus message with tag 340 = 5, indicating the session is to be closed. Orders in process will be permitted to complete, but no new orders or cancel replace operations will be permitted. Once all order processing is completed, Currenex will log the session out.

Users who receive a TradingSessionStatus with tag 340 = 5 as the result of exceeding the limit should gracefully log off and then reestablish the connection.

4 Session Messages

The Currenex FIX specification supports FIX version 4.2 for its FIX Taker ESP service and FIX 4.4 messaging for its other FIX service.

The following convention is used in this document to indicate message direction:

- In – a message sent to Currenex
- Out – a message sent by Currenex.
- In/Out – a message that can be sent to or from Currenex

Available fields, requirements, values and their associated meanings are documented in the Message Details section.

Session messages establish, maintain and terminate a Currenex connection.

- Logon – (In/Out) message sent to initiate a FIX session to Currenex. The Logon message establishes the communication session, authenticates the connecting client, and initializes the message sequence number.
- Heartbeat – (In/Out) message sent by Currenex during periods of application inactivity to ensure connection validity. The receiving party should always respond with a heartbeat message.
- Resend Request – (In) request that certain messages be resent. Often used when gaps are detected in the sequence numbering, when a message is lost, or during the initialization process. Currenex will never send ResendRequest to a client.
- Sequence Reset – (In/Out) used by the sending application to reset the incoming sequence number on the opposing side. This message is also used to respond to the ResendRequest message. It is sent by Currenex in lieu of the administrative messages or when the requested messages are no longer available to be resend.
- Test Request – (In/Out) used to verify session connectivity and to synchronize sequence numbers. The receiving party should always respond with a heartbeat message.
- Logout – (In) signals the normal termination of the trading session. A session terminated without a Logout message will be considered an abnormal condition. The Currenex FIX gateway treats a MP as logged out

4.1 Session Message Details

The fields that make up each message are described in this section.

Note that a number of fields specific to Currenex are also used.

In the below tables, stream specific messages are presented in columns: "Tag," "Field Name," "Required," and "Description" going from left to right.

4.1.1 Standard Header

Tag	Field Name	Required	Comments
8	BeginString	Y	Message start. Handled by FIX engine.
9	BodyLength	Y	Message length. Handled by FIX engine.
35	MsgType	Y	The message type. Refer to individual messages for valid values.
49	SenderCompID	Y	Provided by Currenex - the user's trading account id.
56	TargetCompID	Y	Default setting is "CNX"
34	MsgSeqNum	Y	Message sequence number. Handled by FIX engine.

Tag	Field Name	Required	Comments
43	PossDupFlag	N	Indicates possible retransmission of message with this sequence number: Y = Possible duplicate N = Original transmission Used by Currenex on SequenceResets and ResendRequests.
52	SendingTime	Y	The GMT timestamp on the message. Handled by FIX engine.

4.1.2 Standard Trailer

Tag	Field Name	Required	Comments
10	Checksum	Y	A value calculated by the FIX engine from the message data and transferred with the data. If the data received does not match the CheckSum value, the data was corrupted in transit.

4.1.3 Heartbeat

Tag	Field Name	Required	Comments
	<i>Standard Header</i>	Y	MsgType tag 35 = 0
112	TestReqID	N	Required if heartbeat is due to a Test Request message.
	<i>Standard Trailer</i>	Y	

4.1.4 Logon

Tag	Field Name	Required	Comments
	<i>Standard Header</i>	Y	MsgType tag 35 = A
98	EncryptMethod	Y	0 – not encrypted is the only accepted value.
108	HeartBtInt	Y	Heartbeat interval in seconds.
141	ResetSeqNumFlag	N	Y – Resets both the incoming and outgoing sequence numbers to 1.
554	Password	Y	Id specific password.
	<i>Standard Trailer</i>	Y	

4.1.5 Logout

Tag	Field Name	Required	Comments
	<i>Standard Header</i>	Y	MsgType tag 35 = 5
58	Text	N	Descriptive text message.

Tag	Field Name	Required	Comments
	<i>Standard Header</i>	Y	MsgType tag 35 = 5
			Possible values for initial logon failure include: Configuration Error System Failure Authentication Error
	<i>Standard Trailer</i>	Y	

4.1.6 Resend Request

Tag	Field Name	Required	Comments
	<i>Standard Header</i>	Y	MsgType tag 35 = 2
7	BeginSeqNo	Y	First sequence number in the range to be resent.
16	EndSeqNo	Y	Last sequence number in the range to be resent. For single message resend requests, set BeginSeqNo = EndSeqNo. If request is for all messages subsequent to a particular message, EndSeqNo = 0.
	<i>Standard Trailer</i>	Y	

4.1.7 Sequence Reset

Tag	Field Name	Required	Comments
	<i>Standard Header</i>	Y	MsgType tag 35 = 4
123	GapFillFlag	N	Indicates that the Sequence Reset message is replacing administrative or application messages which will not be resent. N=Sequence Reset Y=Gap Fill Message, NewSeqNo field must have a value
36	<i>NewSeqNo</i>	Y	New sequence number
	<i>Standard Trailer</i>	Y	

4.1.8 Test Request

Tag	Field Name	Required	Comments
	<i>Standard Header</i>	Y	MsgType tag 35 = 1
112	TestReqID	Y	Unique ID of test request.
	<i>Standard Trailer</i>	Y	

5 Appendices

5.1 Revision History

Revision Number	Revision Date	Page Number	Update
1	20 August 2012	3	<u>Section 2.2.1</u> has been revised to reflect the change in sequence number reset from nightly to weekly.
2	28 May 2014	3	<u>Section 2.2.1</u> : Added a note regarding TradingSessionStatus prior to weekly logout.
3	27 March 2015	8	<u>Section 4.1.5</u> : Added possible valued for Text (58) for initial logon failure.
4	25 August 2015	3	<u>Section 2.2</u> : Updated description of persistence.
5	8 February 2016	3	<u>Section 2.2</u> : Added note on Currenex Big and MidX.
6	5 June 2017	*	New Template applied throughout.
7	30 July 2019	3,6,9	Added persistence support
8	17 September 2019	5	Added info about Cancel on Disconnect and persistence
9	05 January 2021	3	Updated Section 2.2.1